


## DIMENSIONS AND NOMINAL VALUES

TYPE	Volum. del. l/min	Depth of immer. h(mm)	Pipe conn. G	Weight kg	Power kw	Voltage V(ΔY)	Frequency Hz	Rated current A	Revo- lution rpm
FP 40 15	30	150	G 3/4	7.8	0.40	230/400	50	1.9/1.1	2820
FP 40 20		200		8.0					
FP 40 25		250		8.5					
FP 40 30		300		8.6					

Volumetric delivery \* is measured at 2m water height. (± % 10)

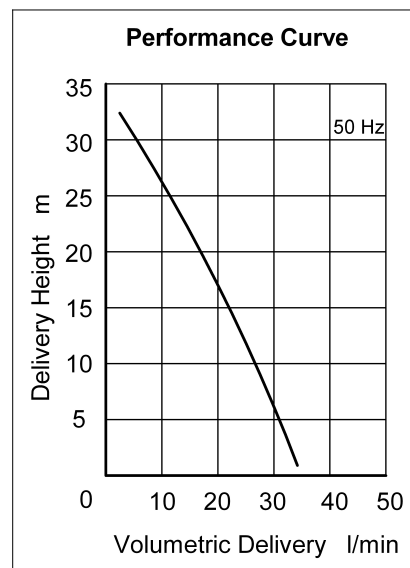

Kinematic viscosity: 90mm<sup>2</sup>/s  
Operating Temperature Range: 0...60°C

### PROPERTIES:

- FP 40 Pump series are designed for circulation of cutting and chemical fluids.
- They serve as cooling and lubrication units on machine tools and automatic sews, etc.
- The shaft of the FP 40 Pump is made of engineering steel.
- The impeller of the FP 40 Pump is made of brass.
- The main body and pump intake cover of standart FP 40 Pump are cast iron.
- Standard FP 40 Pump has a three-phase motor . On demand, it can be equipped with a single-phase motor and other voltage, frequency.

THE DIMENSIONS OF THE PUMPS CONFORMS TO EN 12157 SPECIFICATIONS.