
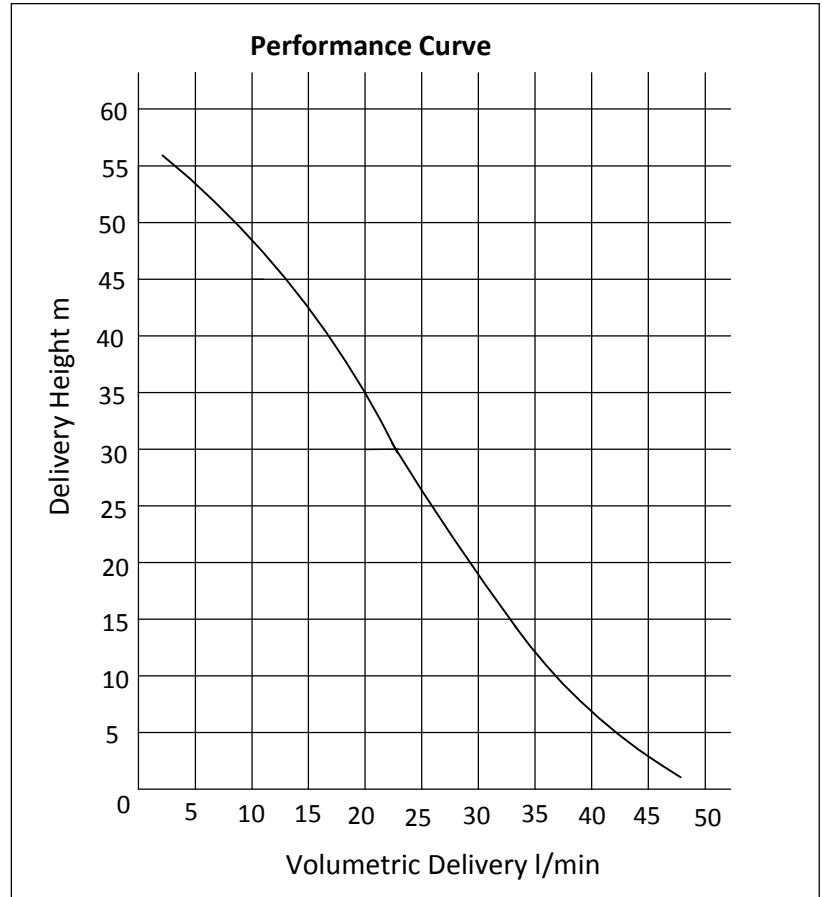


## DIMENSIONS AND NOMINAL VALUES

TYPE	Volum. del. l/min	Depth of immer. h(mm)	Pipe conn. G	Weight kg	Power kw	Voltage V( $\Delta Y$ )	Fre- quency Hz	Rated current A	Revo- lution rpm
FP 90 11	50	110	G 3/4	10.15	0.90	230/400	50	4.58/2.65	2825
FP 90 15		150		10.4					
FP 90 20		200		10.6					
FP 90 25		250		10.8					
FP 90 30		300		11.2					

Volumetric delivery \* is measured at 2m water height. ( $\pm$  % 10)

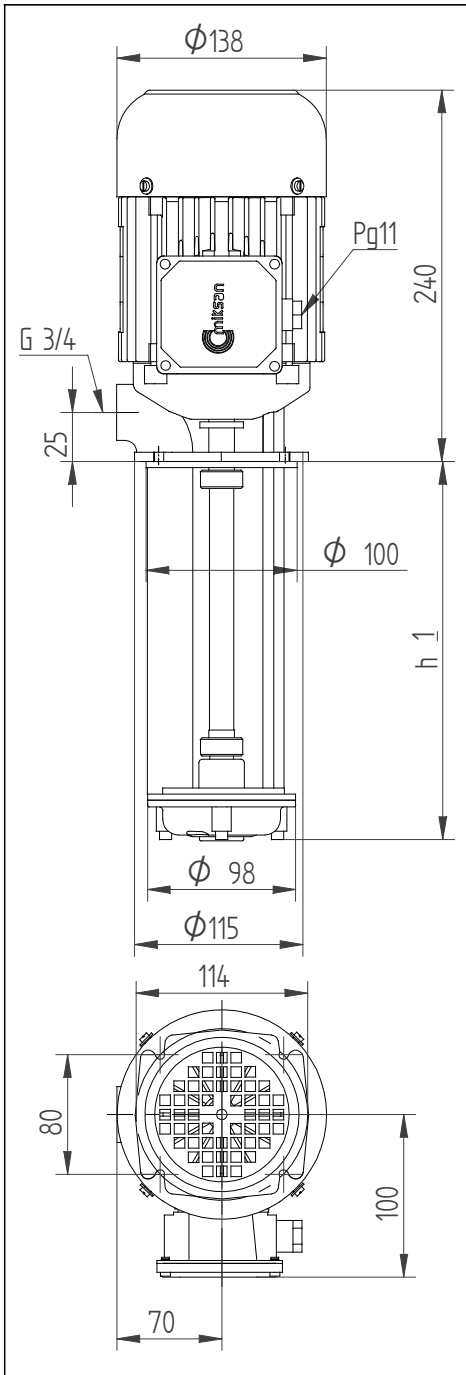

Kinematic viscosity: 90mm<sup>2</sup>/s

Operating Temperature Range : 0....60 °C

### PROPERTIES:

- FP 90 Pump series are designed for circulation of cutting and chemical fluids.
- They serve as cooling and lubrication units on machine tools and automatic sews, etc.
- The shaft of the FP 90 Pump is made of engineering steel.
- The main body and pump intake cover of standart FP 90 Pump are cast iron.
- The impeller of the FP 90 Pump is made of brass.
- Standard FP 90 Pump has a three-phase motor. On demand, it can be equipped with a single-phase motor and other voltage, frequency.

THE DIMENSIONS OF THE PUMPS CONFORMS TO STANDARD EN 12157 SPECIFICATIONS.

Adress: Oto sanayi sitesi çelik sok. No:60

4. Levent/ISTANBUL

Tel: 90 212 284 64 00

Fax: 90 212 279 55 67

[www.miksánmotor.com](http://www.miksánmotor.com)

[info@miksánmotor.com](mailto:info@miksánmotor.com)